



# TYPE RB

## FRAME

### COLOUR

- White RAL 9010 (standart)
- Black RAL 9005
- Silver RAL 9006
- RB 703

### MECHANIC

- Tension mechanism

## COVER

### MDT-TEX 260 FR

- (Polyester - fire retardant)

### More on request

### Optimal

### MDT-TEX 300

- (Acryl)

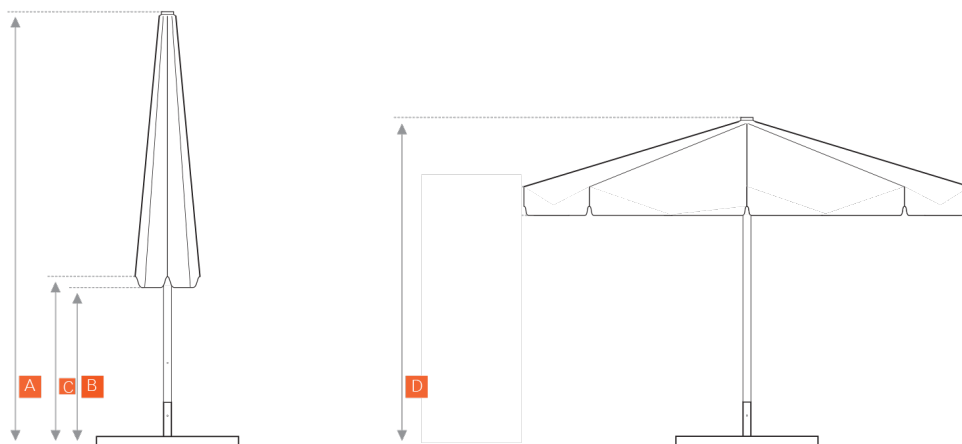
## ANCHORINGS

### FRAME BASE

- Type 060

### INGROUND TUBE

- Type 060

**// DIMENSIONS & MEASURES**

**DIMENSIONS ARE IN METRICAL SYSTEM**

\*all measurements are rounded

**MASS**

	 3 x 3	 3,5 x 3,5	 4 x 4
Umbrella with packaging (kg)	23.3	24.3	25.3
Umbrella without packaging (kg)	20.3	21.3	22.3
Frame (kg)	15.5	16	16.5
Cover (kg)	3.8	4.3	4.8

**DIMENSIONS OF CLOSED UMBRELLA**

<b>A</b> Closed height (cm)	335	335	380
<b>B</b> Distance from spokes to ground (cm)	123	89	95

**DIMENSIONS OF OPEN UMBRELLA**

<b>C</b> Opened height (cm)	274	265	295
<b>D</b> Distance from spokes to ground (cm)	218	215	220

**PACKAGING DIMENSIONS**

Total length (cm)	335	335	380
Dimensions of cardboard packaging (cm)	30x30x280	30x30x280	30x30x280
Length of mast extruding from box (cm)	55	55	100

**ANCHORING AND ACCESSORIES**

Adapter (*1)	Type 060	Type 060	Type 060
Frame base (*2)	Type 060/505	Type 060/505600	Type 060/505600
Cross stand (*3)	Type 060/505	Type 060/505	Type 060/505
Steel plate stand (*4)	Type 060/120	Type 060/120	Type 060/120
Ground tube (*5)	Type 060	Type 060	Type 060S Type
Adaptor foldable (*6)	Type 060/ foldable	Type 060/ foldable	060/ foldable
Protective sleeve size	M	M	M

all dimensions + weights given are approximate

